


AIR COOLED - AFTER COOLER

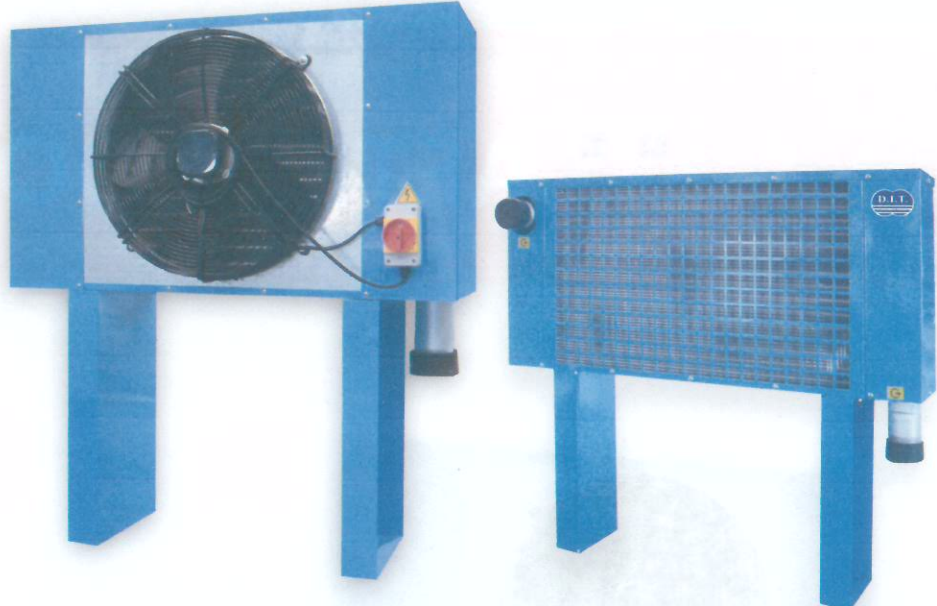

CAPACITY : 1.8 - 36 M³ / min

AIR CONNECTION : 1" ~ 3"


MAX. WORKING PRESSURE : 16 Kg/cm²

FLOW RATE REFERS TO :

99 °C INLET

35 °C AMBIENT

+ 10 °C OUTLET OF AMBIENT TEMP.

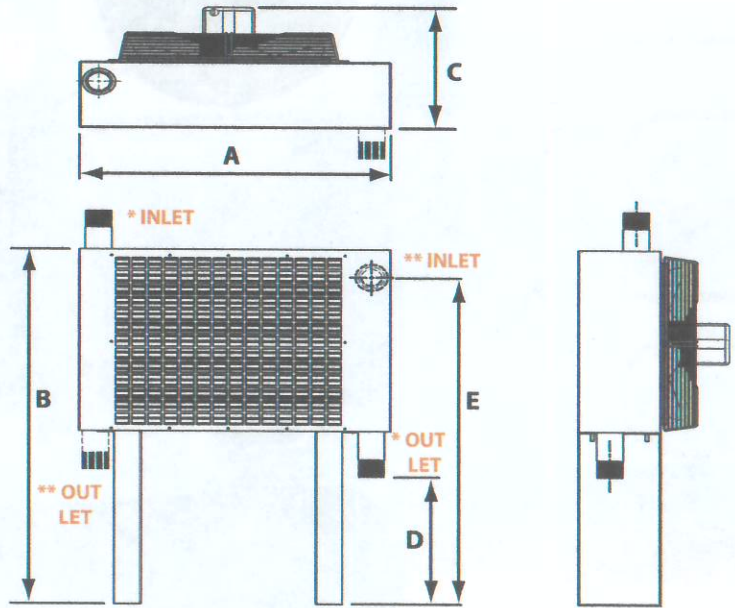

Series	Air flow rate		V / Ph / Hz.	Conn.	Dimension (mm.)					Weight (Kg.)
	M ³ /min	CFM			A	B	C	D	E	
DAC 015	1.8	63	220/1/50	1"	445	710	235	360	-	17
DAC 040	5.5	193	220/1/50	1-1/2"	573	820	280	300	-	29
DAC 075	11	385	220/1/50	2"	880	820	310	320	-	38
DAC 150	22	770	380/3/50	2-1/2"	920	1000	320	-	930	51
DAC 250	36	1260	380/3/50	3"	1120	1200	330	-	1130	76

* INLET & OUTLET FOR MODEL DAC 015 - 075

** INLET & OUTLET FOR MODEL DAC 150 - 250